




DEPTH SAND FILTERS

H

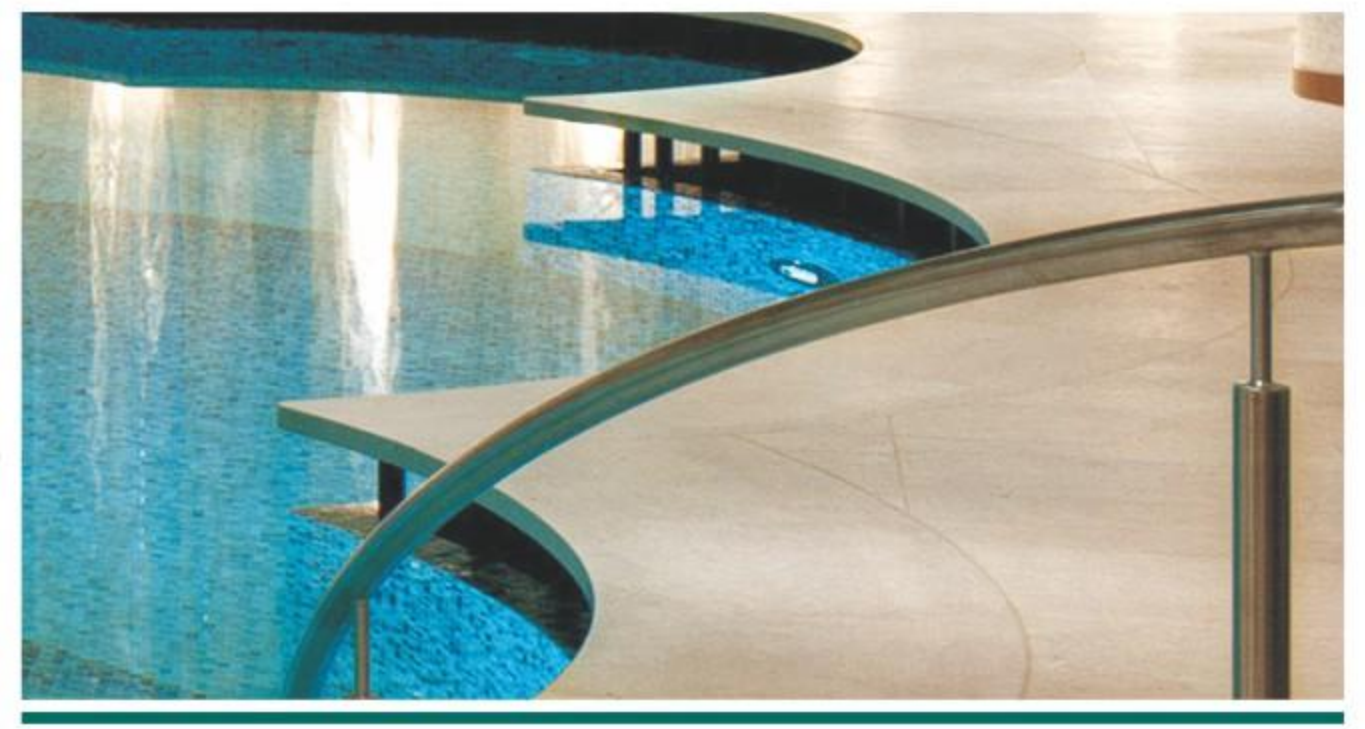

Maximum working pressure:

4kg/cm²

Maximum temperature:

45°C



- Anti - UV protective layer of fiber glass wound reinforced filter tank.
- Ergonomically designed six position multiport valve.
- Excellent filtering ability.
- Chemical resistance.

Specification and size:

Model	Tank Dia	Connection Size	Filter Area	Flow	Silica Sand	Height
	(mm)		(m ²)	(m ³ /h)	(kg)	(mm)
H15400	400	DN40	0.126	5.0	185	1500
H15450	450	DN40	0.159	6.3	215	1500
H15500	500	DN40	0.196	8.0	250	1500
H15600	600	DN40	0.283	11.3	380	1500
H15700	700	DN40	0.385	15.4	500	1500