

UV DISINFECTION DEVICE



PM

- Original imported UV lamp, Service life up to 10000 hours.
- High transmittance quartz tube.
- Ballast (more than 5
 years service life, with a
 warning indicator).



- High-strength plastic housing.
- With electric control box.
- Two options: Vertical installation or horizontal installation.

Specification and size:

Union




Water Proof And UV Resistant Control Box







Vertical

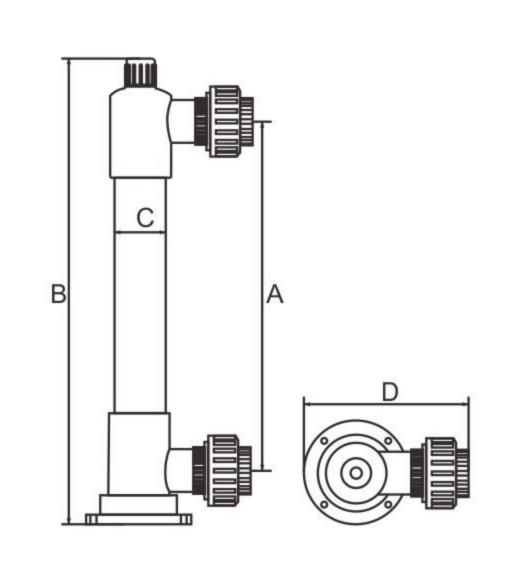

Model	Voltage	Working Pressure	Flow	UV Lamp Power	Connection Size	Operating Temperature	Dimensions A/B/C/D
	(V/Hz)	(kg/cm²)	(m³/h)	(W)	(寸)	(°C)	(mm)
PM-III	100~240/50~60	2.8	18	87	DN50	2~40	743/970/114/284
PM-IV	100~240/50~60	2.8	23	120	DN50	2~40	1038/1265/114/284